

Ultra-thin full power keypad digital portable radio

X1p

Hytera X1p, ultra-thin full power keypad digital portable radio, complies fully with ETSI open standard. Perfect combination of structural rigidity, versatile functionalities, and refined design; secure communication ensured by AES encryption algorithm & 256 digit dynamic encryption keys; convenient application development facilitated by built-in BT and USB port; and worry-free handling achieved by IP67 protection.

All comes with a surprisingly small size: 21mm (1100mAh Li-ion battery) thin.



X1p



Innovative Design

① Ease of use

Easy to use with the rugged body as thin as 21mm, professional wireless headsets or collar microphone, palm controller and flexible antenna.

② IP67 compliance

Complies with IP67 requirements, withstanding up to 1m submersion for 30 minutes or more.

③ Rugged & reliable

Complies with MIL-STD-810 C/D/E/F/G standards and passes HALT (Highly Accelerated Life Test) .

④ Large-size colour display

X1p adopts a 1.8" TFT LCD display (65536 colours), allowing good visibility even under outdoor strong sunlight.



Hytera X1p

Features



Advanced encryption

AES encryption algorithm & 256 digit dynamic encryption keys ensure secure communication.



Supports Hytera BT accessories

The radio supports Hytera BT accessories: EHW02, BT earpiece; POA47, BT Ring PTT.



Open USB interface

Open USB port facilitates secondary and application development.



GPS positioning

The built-in GPS module supports GIS applications.



Dual mode (analog & digital)

Dual modes (analog & digital) operation ensures a smooth analog-to-digital migration.



Versatile voice calls

Versatile voice calls include individual call, group call and all-call.



Vibration

Vibration alerts the reception of voice call and message.



Rich signaling

Supports multiple advanced analog signaling, including HDC1200, DTMF phone, 2-Tone and 5-Tone, providing more expansion capacity.



Software upgradable


Upgrade software enables new features without buying a new radio; X1p can also be switched into MPT and DMR trunking modes with corresponding license applied to the same hardware.

Work with Hytera dispatch system and Portable repeater to achieve flexible networking & dispatching

For mission critical users like special police, anti-drug/anti-smuggling officer, senior guard, senior executives, etc.. When a professional terminal is insufficient to accomplish the tasks required and ensure safety this is where a complete communications solution is demanded.

Hytera dispatch system

A digital dispatching system developed on the Hytera digital platform in compliance to ETSI DMR open standard, is designed for efficient communication, management and dispatching of professional users.

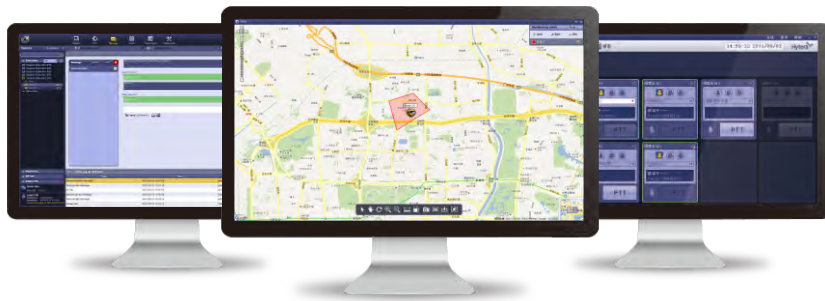

- All types of voice calls

Hytera dispatch system supports all types of calls that meet your various dispatching operational needs, include private call, group call, all call. Every Hytera dispatch system dispatcher client console is able to dispatch up to 8 voice dispatching channels. Through these dispatching channels, Hytera dispatch system could receive all types of calls as well as trigger any type of call through user friendly and easy to operate user interface.

- Voice recording & playback

All incoming calls and outgoing calls will be recorded in Hytera dispatch system server. This includes all types of DMR voice calls and PSTN interconnected calls. Users can retrieve recorded voice and playing back at any time. All recorded voices are easily can be searched through time, caller ID or callee ID.

- Radio kill & radio revive


Hytera dispatch system is able to kill a radio unit remotely when the radio unit is under illegal use or has been stolen. The killed radio is able to power on but unable to transmit or receive. Hytera dispatch system is also able to activate a killed radio when necessary.

- Real-time tracking

This feature allows Hytera dispatch system to track the location of any radio units in real-time. Users have an option to display the location route on the map. On critical missions, the dispatcher can send staff nearby to check and help when the route of a patrol has halted.

Portable repeater for flexible networking

Take the portable repeater to extend the coverage area, allow flexible networking and high mobility in tasks, which is especially helpful in tracking, body guarding and mobile dispatching.

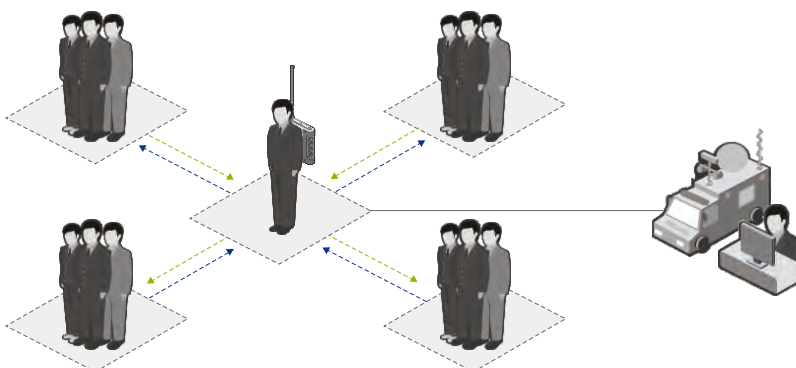

Portable repeater



Learn more about Hytera dispatch system and the backpack repeater, please visit www.hytera.com or contact our local dealers and sales representatives.

Versatile accessories for specific tasks



Pictures above are for reference only and may vary from actual products.

Accessories

| | | | |
|---|---------|--|---------|
| Li-ion Battery 1100mAh | BL1103 | Wireless Earpiece With Dual-PTT | EHW02 |
| Li-ion Battery 1400mAh | BL1401 | BT Ring PTT | POA47 |
| Li-ion Battery 1800mAh | BL1809 | Belt Charger | CH04L01 |
| Switching Power(US-standard) 12V 1A | PS1014 | Blet Clip | PCN005 |
| MCU Dual Charger | CH10L16 | Digital Wireless Covert Earpiece With in-Line Controller (Neckloop Sensor) | EWN07 |
| 3-wire Surveillance Earpiece with Transparent Acoustic Tube (Beige) | EAN21 | Digital Wireless Covert Earpiece (Flatpack Sensor) | EWN08 |
| Remote C-Earset | EHN21 | Detachable Earpiece with Transparent Acoustic Tube | EAN22 |
| Remote Swivel Earset | EHN20 | 3-wire Dual-PTT Surveillance Earpiece with Transparent Acoustic Tube (Beige) | EAN19 |
| Remote Earbud | ESN14 | NiTi Antenna | |
| Vest | NCN009 | | |

High-capacity Battery & Belt Charger:

BL1809, Li-ion Battery 1800mAh; CH04L01, Belt Charger. For users require long-time operation, a high-capacity battery with belt charger is undoubtedly the best match. The 1800mAh Li-ion battery of X1p enables it to work for up to 15 hours, and the belt charger further extends its operation time with convenient charging.

Audio Accessories

EWN08, Wireless Earphone; EHW02, BT earpiece; POA47, BT Ring PTT. X1p has a variety of audio accessories for flexible use in actual environments.



Target Customers

Mission critical users:
special police, anti-drug/anti-smuggling officer, senior guard,
senior executives.

Specifications

| | | | |
|---------|---|--|--|
| General | Frequency Range | UHF1: 400-470MHz; UHF2:450-520MHz; UHF3: 350-400MHz UHF5: 806-941MHz; VHF: 136-174MHz | |
| | Channel Capacity | 1024 | |
| | Zone Capacity | 64 | |
| | Channel Spacing | 25/20/12.5kHz | |
| | Operating Voltage | 7.4V (rated) | |
| | Battery | 1100mAh (Li-Ion) 1400mAh (Li-Ion) 1800mAh (Li-Ion) | |
| | Battery Life (5-5-90 Duty Cycle, High TX Power) | Digital: 10 Hours @1100mAh 12 Hours @1400mAh 15 Hours @1800mAh | Analog: 7 Hours @1100mAh 9 Hours @1400mAh 12 Hours @1800mAh |
| | Frequency Stability | ±1.5ppm | |
| | Antenna Impedance | 50Ω | |
| | Dimensions (H×W×D) (with battery, without antenna) | 120 x 57 x 21mm (1100mAh Li-ion battery) 120 x 57 x 23mm (1400mAh Li-ion battery) 120 x 57 x 26mm (1800mAh Li-ion battery) | |
| | Weight | 252g (1100mAh Li-ion battery) 265g (1400mAh Li-ion battery) 287g (1800mAh Li-ion battery) | |
| | LCD Display | 160 x 128 pixels, 65536 colors 1.8 inch, 6 rows | |

| | | | |
|----------|--|--|--|
| Receiver | Sensitivity | Analog | 0.3 μV (12dB SINAD) 0.22 μV (Typical) (12dB SINAD) 0.4 μV (20dB SINAD) |
| | | Digital | 0.3 μV / BER5% |
| | Selectivity TIA-603 ETSI | 60dB @ 12.5kHz / 70dB @ 20&25kHz 60dB @ 12.5kHz / 70dB @ 20&25kHz | |
| | Intermodulation TIA-603 ETSI | 70dB @ 12.5/20/25kHz 65dB @ 12.5/20/25kHz | |
| | Spurious Response Rejection TIA-603 ETSI | 70dB @ 12.5/20/25kHz 70dB @ 12.5/20/25kHz | |
| | Hum and Noise | 40dB @ 12.5kHz 43dB @ 20kHz; 45dB @ 25kHz | |
| | Rated Audio Distortion | ≤3% | |
| | Audio Response | +1 ~ -3dB | |
| | Conducted Spurious Emission | < -57dBm | |

| | | | |
|------------------|-----------------------------|---|-------------|
| Transmitter | RF Power Output | UHF1/UHF2/UHF3 High Power: 4W UHF1/UHF2/UHF3/UH5 Low Power: 1W UHF5 High Power: 3W (806-870MHz), 2.5W (896-941MHz) VHF High Power: 5W VHF Low Power: 1W | |
| | FM Modulation | 11K0F3E @ 12.5kHz 14K0F3E @ 20kHz 16K0F3E @ 25kHz | |
| | 4FSK Digital Modulation | 12.5kHz Data Only: 7K60FXD 12.5kHz Data & Voice: 7K60FXW | |
| | Conducted/Radiated Emission | -36dBm<1GHz | -30dBm>1GHz |
| | Modulation Limiting | ±2.5kHz @ 12.5kHz ±4.0kHz @ 20kHz ±5.0kHz @ 25kHz | |
| | FM Hum & Noise | 40dB @ 12.5kHz 43dB @ 20kHz 45dB @ 25kHz | |
| | Adjacent Channel Power | 60dB @ 12.5kHz; 70dB @ 20/25kHz | |
| | Audio Response | +1 ~ -3dB | |
| | Audio Distortion | ≤3% | |
| | Digital Vocoder Type | AMBE++ or SELP | |
| Digital Protocol | ETSI-TS102 361-1, 2&3 | | |

| | | |
|------------------------------|------------------------------------|---|
| Environmental Specifications | Operating Temperature | -30°C ~ +60°C |
| | Storage Temperature | -40°C ~ +85°C |
| | ESD | IEC 61000-4-2 (level 4) ±8kV (contact) ±15kV (air) |
| | American Military Standard | MIL-STD-810 C/D/E/F/G |
| | Dust & Water Intrusion | IP67 Standard |
| | Humidity | Per MIL-STD-810 C/D/E/F/G Standard |
| Shock & Vibration | Per MIL-STD-810 C/D/E/F/G Standard | |

| | | |
|-----|------------------------------------|-------------|
| GPS | TTFF(Time To First Fix) Cold Start | <1 minute |
| | TTFF(Time To First Fix) Hot Start | <10 seconds |
| | Horizontal Accuracy | <10 metres |

All specifications are subject to change without notice due to continuous development.



Hytera Communications Corporation Limited

Address: Hytera Tower, Hi-Tech Industrial Park North, Beihuan Rd.,
Nanshan District, Shenzhen, China

Tel: +86-755-2697 2999 **Fax:** +86-755-8613 7139 **Post:** 518057

Http: //www.hytera.com **Stock Code:** 002583.SZ



Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Communications Co., Ltd.

© 2013 Hytera Communications Co., Ltd. All Rights Reserved.